

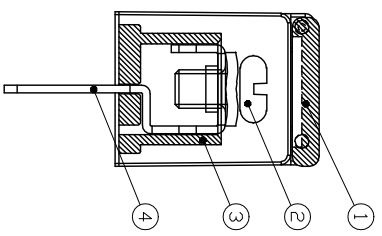
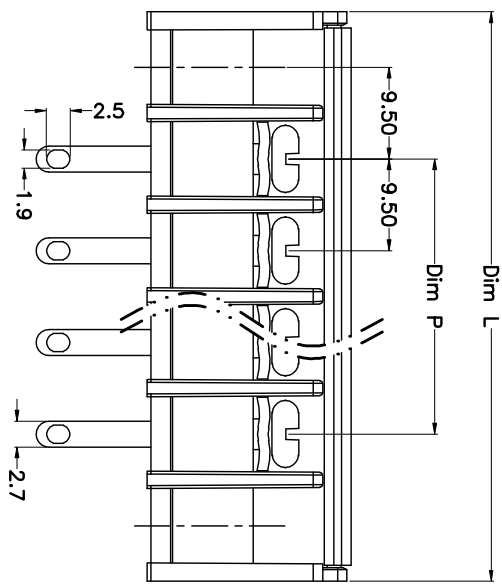
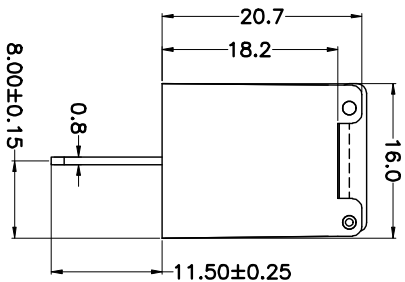


REV.	DESCRIPTION	DATE	DRAWN	APPROVED
A1	DWG.REL	2015.3.12	FANG	YANG

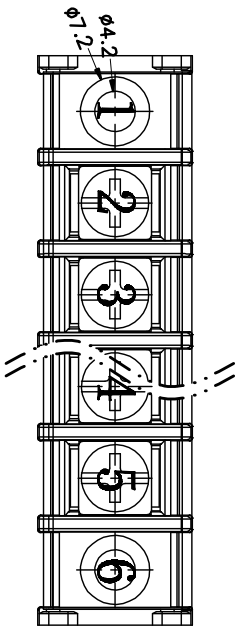

N=Number of Poles
Dim P=(N-1)X9.50
Dim L=Nx9.50+21

Poles	Dim P	Dim L
2-6P	± 0.10	± 0.15
7-12P	± 0.20	± 0.20
13-18P	± 0.25	± 0.30
19-24P	± 0.30	± 0.40

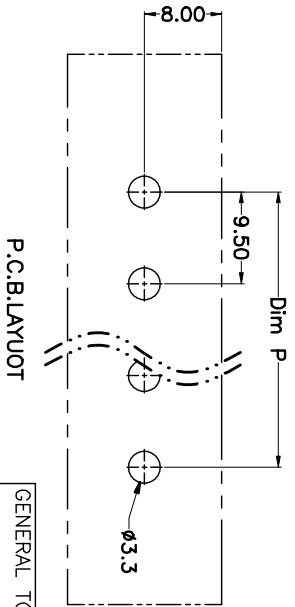

GENERAL TOLERANCE	ANGLE TOLERANCE
X. ± 0.5	X. $\pm 5'$
.X ± 0.3	.X. $\pm 3'$
.XX ± 0.1	.XX' $\pm 1'$


DRAWING TYPE	CUSTOMER
SCALE	1:1
DRAWING NO.	SHEET 1 OF 1

- Material
 - ①Cover : PC
 - ②Screws : M4.0 steel, Ni plated
 - ③Housing : PA66,UL94V-0
 - ④Terminal : Brass, Tin plated

- Electrical UL IEC
 - Rated voltage : 300V 750V
 - Rated current : 25A 32A
 - Insulation resistance: 500M Ω /DC500V
 - Withstanding Voltage : AC2000V//1min
 - Wire range: 22-12AWG 4.0mm²

- Mechanical
 - Operating temperature: -40 $^{\circ}$ C to +105 $^{\circ}$ C
 - Soldering temperature: 250 $^{\circ}$ C ± 5 /5sec
 - Torque: 1.2N.m (10.53Lb.in)

HOW TO ORDER

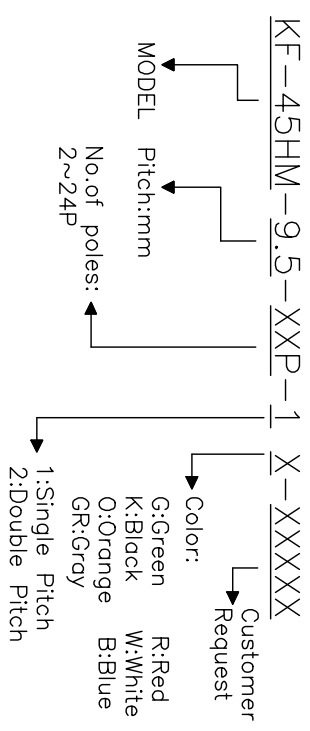

PROJECTION	TITLE
UNITS mm	KF-45HM-9.5-XXP
SHEET SIZE A4	SERIES KF-45HM

科奕科技有限公司