
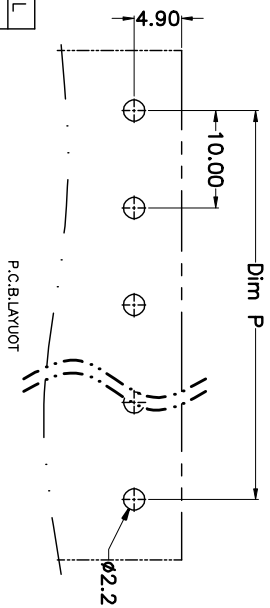
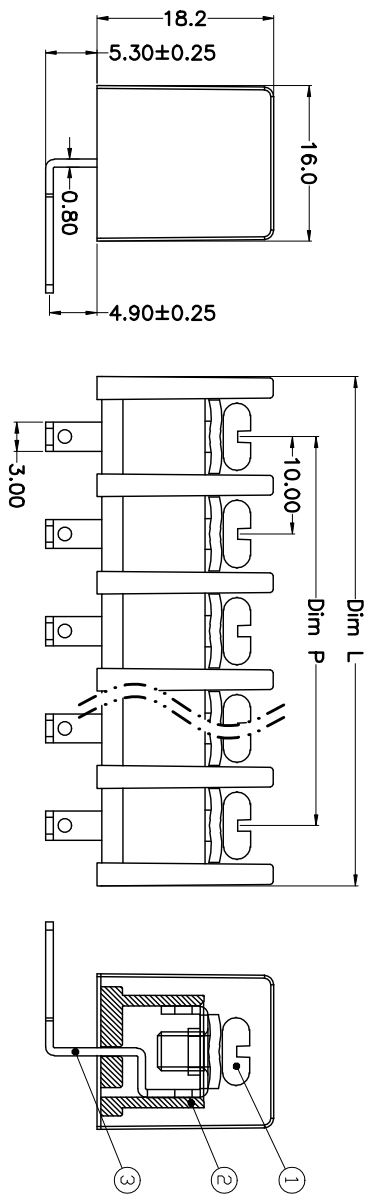


REV.	DESCRIPTION	DATE	DRAWN	APPROVED
A1	DWG.REL	2015.3.12	FANG	YANG

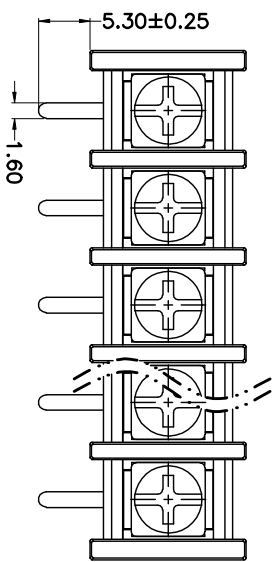


N=Number of Poles
 Dim P=(N-1)×10.00
 Dim L=N×10.00+2.4

Poles	Dim P	Dim L
2-6P	±0.10	±0.15
7-12P	±0.20	±0.20
13-18P	±0.25	±0.30
19-24P	±0.30	±0.40

- Material
 - ①Screws : M4.0 steel, Ni plated
 - ②Housing : PA66,UL94V-0
 - ③Terminal : Brass, Tin plated
- Electrical
 - UL IEC
 - Rated voltage : 300V 750V
 - Rated current : 25A 32A
 - Insulation resistance: 500MΩ/DC500V
 - Withstanding Voltage : AC2000V/1min
 - Wire range: 22-12AWG 4.0mm²
- Mechanical
 - Operating temperature:-40℃~+105℃
 - Soldering temperature:250℃±5/5sec
 - Torque: 1.2N.m (10.53Lb.in)

HOW TO ORDER

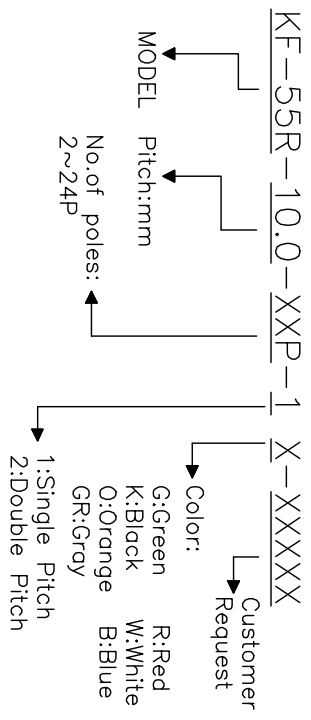

GENERAL TOLERANCE	ANGLE TOLERANCE	SCALE	DRAWING NO.
X: ±0.5 X: ±0.3 .XX ±0.1	X: ±5° X: ±3° .XX ±1°	1:1	

PROJECTION	TITLE
mm	KF-55R-10.0-XXP
SHEET SIZE	SERIES
A4	KF-55R

科奕科技有限公司