

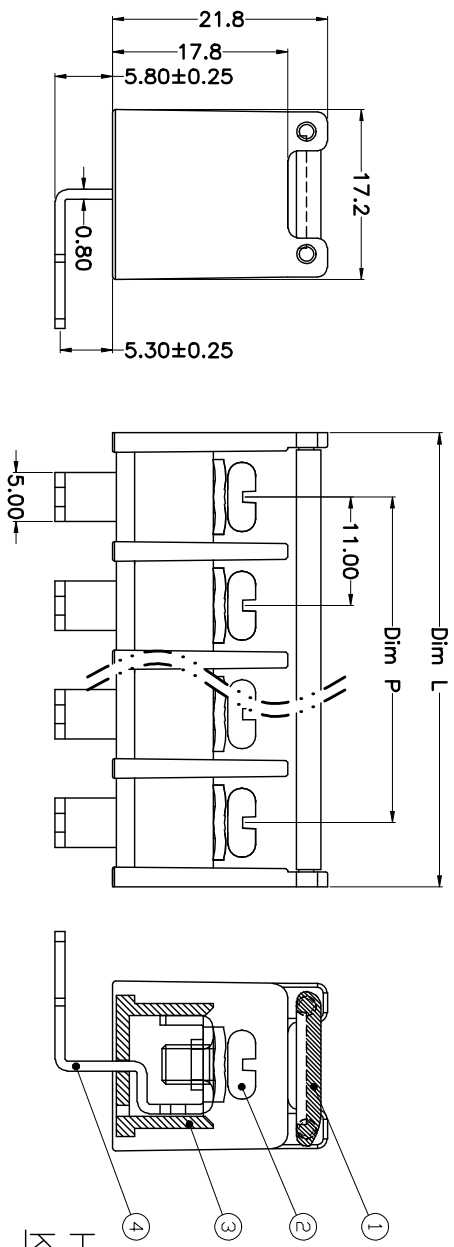


REV.	DESCRIPTION	DATE	DRAWN	APPROVED
A1	DWG.REL	2015.3.12	FANG	YANG

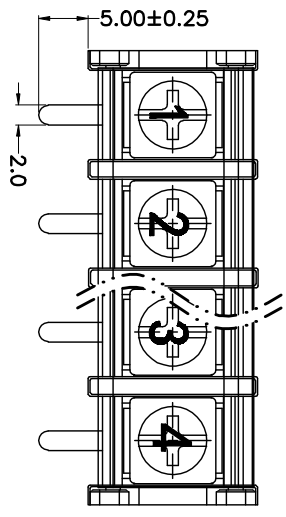

N=Number of Poles  
 Dim P=(N-1)X11.00  
 Dim L=Nx11.00+2

Poles	Dim	Dim P	Dim L
2-6P		±0.10	±0.15
7-12P		±0.20	±0.20
13-18P		±0.25	±0.30
19-24P		±0.30	±0.40

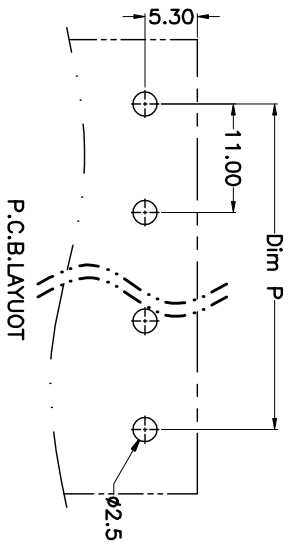


- Material
  - ①Cover : PA66,UL94V-0
  - ②Screws : M4.0 steel, Ni plated
  - ③Housing : PA66,UL94V-0
  - ④Terminal : Brass, Tin plated

- Electrical
  - UL IEC
  - Rated voltage : 300V 750V
  - Rated current : 25A 32A
  - Insulation resistance: 500MΩ/DC500V
  - Withstanding Voltage : AC2000V/1min
  - Wire range: 22-12AWG 4.0mm<sup>2</sup>

- Mechanical
  - Operating temperature:-40°C~+105°C
  - Soldering temperature:250°C±5/5sec
  - Torque: 1.2N.m (10.53lb.in)

HOW TO ORDER

KF-65RM-11.0-XXP-1 X-XXXXX

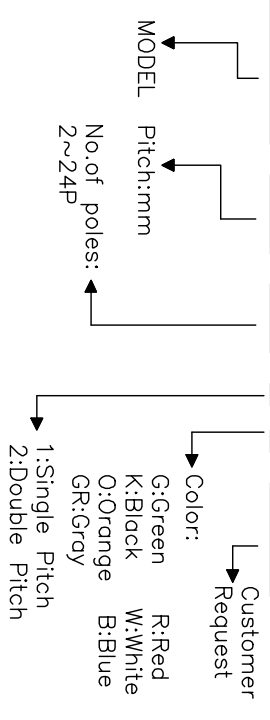

GENERAL TOLERANCE	ANGLE TOLERANCE	SCALE	DRAWING NO.
X: ±0.5 X: ±0.3 .XX ±0.1	X: ±5° X: ±3° .XX ±1°	1:1	

PROJECTION	TITLE
mm	KF-65RM-11.0-XXP
SHEET SIZE A4	SERIES KF-65RM

科奕科技有限公司