

REV.	DESCRIPTION	DATE	DRAWN	APPROVED
A1	DWG.REL	2015.3.12	FANG	YANG



- Material
 - ①Housing : PA66,UL94V-0
 - ②Terminal : Brass, Ni plated
 - ③Plane film: Brass, Ni plated
 - ④Screws : M4.0 steel, Ni plated

- Electrical UL IEC
 - Rated voltage : 300V 750V
 - Rated current : 25A 32A
 - Insulation resistance: 500MΩ/DC500V
 - Withstanding Voltage : AC2000V/1min
 - Wire range: 22-12AWG 4.0mm²

- Mechanical
 - Operating temperature:-40℃~+105℃
 - Soldering temperature:250℃±5/5sec
 - Torque: 1.2N.m (10.53Lb.in)

HOW TO ORDER

KF-55B-10.0-XXP-1 X-XXXXX

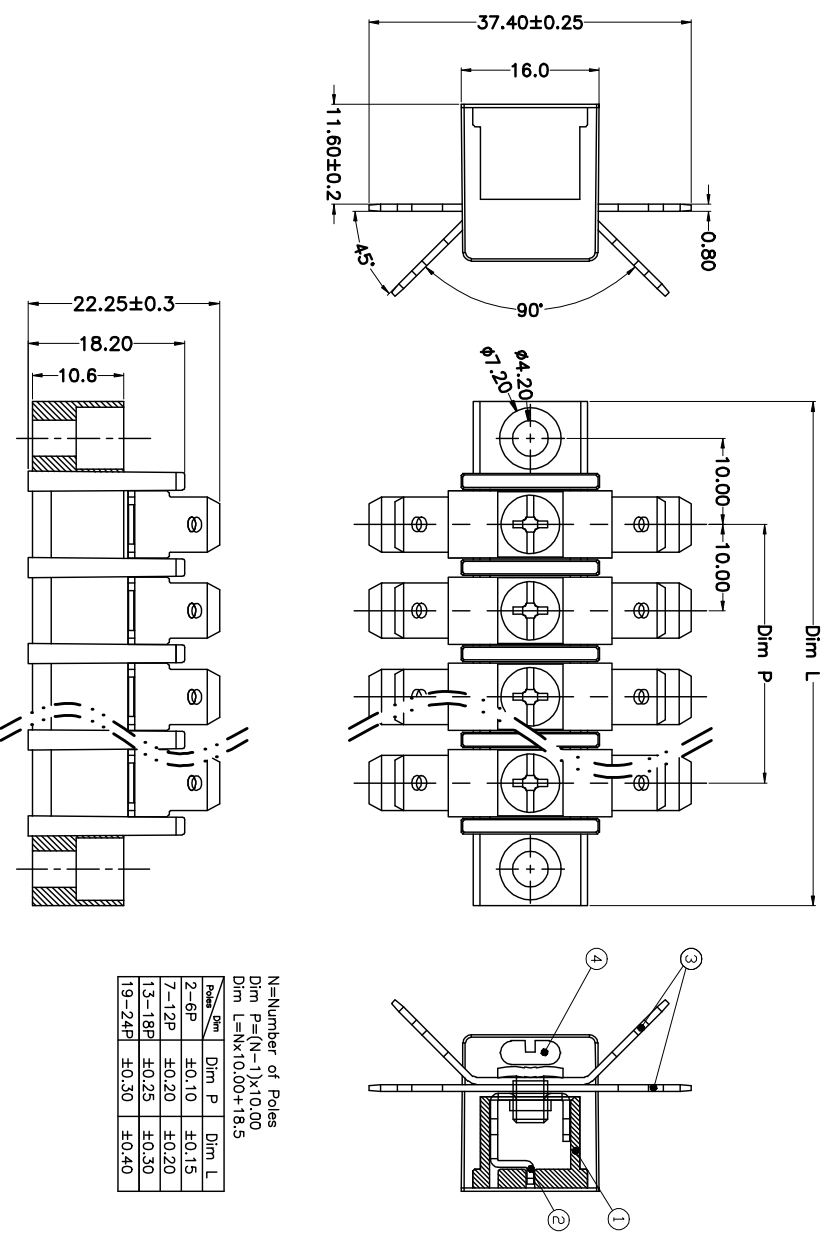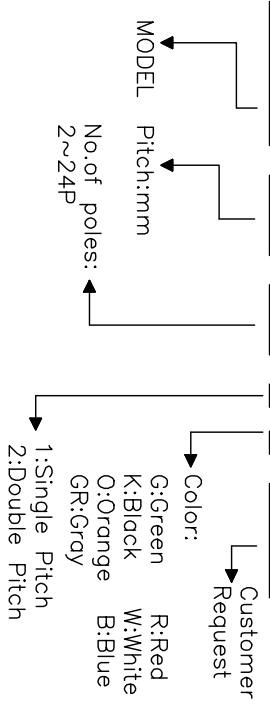

N=Number of Poles
Dim P=(N-1)X10.00
Dim L=Nx10.00+18.5

Poles	Dim P	Dim L
2-6P	±0.10	±0.15
7-12P	±0.20	±0.20
13-18P	±0.25	±0.30
19-24P	±0.30	±0.40

GENERAL TOLERANCE ANGLE TOLERANCE

X.	±0.5	X.	±5'
.X	±0.3	.X.	±3'
.XX	±0.1	.XX.	±1'

DRAWING TYPE	CUSTOMER	SHEET	1 OF 1
SCALE	1:1		
DRAWING NO.			

PROJECTION UNITS TITLE

mm	KF-55B-10.00-XXP
A4	SERIES KF-55B

科奕科技有限公司