
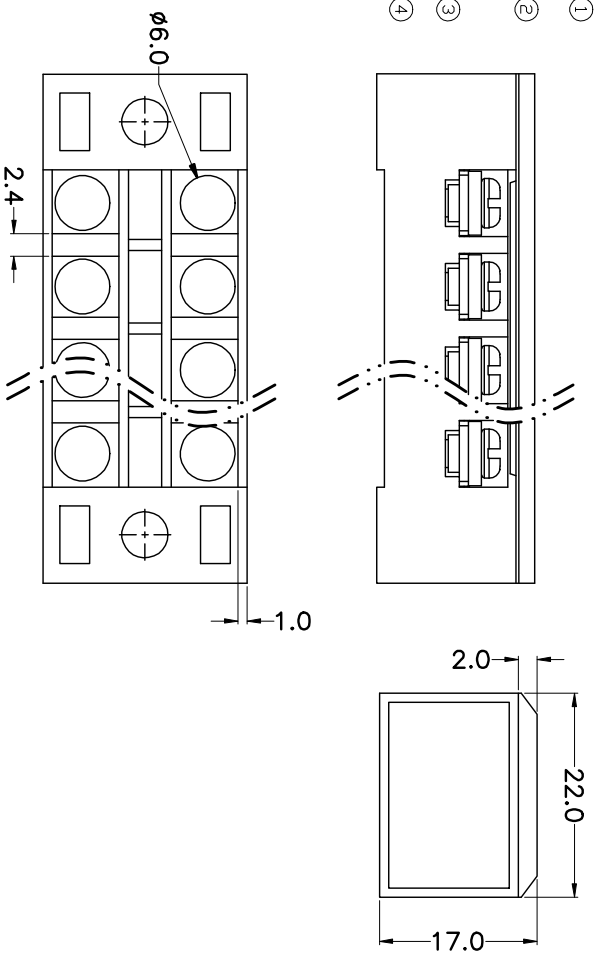



REV.	DESCRIPTION	DATE	DRAWN	APPROVED
A1	DWG.REL	2015.3.12	FANG	YANG

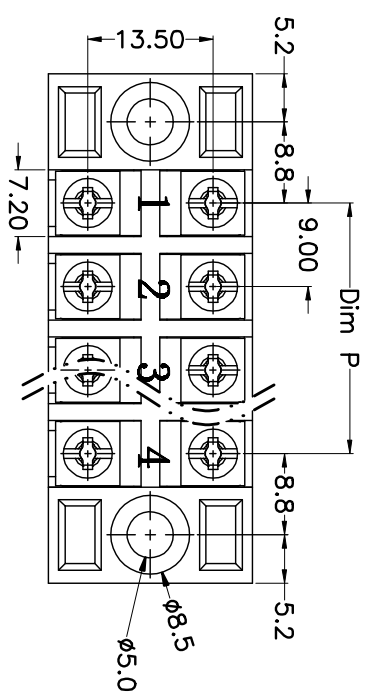

N=Number of Poles
Dim P=(N-1)x9.00

Poles	Dim P	Dim P	Dim L
3-6P	±0.10	±0.15	
(7,8,10,12)P	±0.20	±0.20	
14P	±0.30	±0.40	

GENERAL TOLERANCE	ANGLE TOLERANCE
X. ±0.5	X. ±5°
.X ±0.3	.X ±3'
.XX ±0.1	.XX ±1'

DRAWING TYPE	CUSTOMER
SCALE	1:1
SHEET	1 OF 1
DRAWING NO.	

PROJECTION	TITLE
mm	TB-150-9.0-XXP
SHEET SIZE	SERIES
A4	TB-150

科奕科技有限公司

- Material
 - @Housing : PA66, UL94V-0
 - @Screws : M3 steel, Ni plated
 - @Terminal: brass, Nickel plating
 - @Cover : PC
- Electrical
 - UL IEC
 - Rated voltage : 300V 250V
 - Rated current : 15A 24A
 - Insulation resistance: 500MΩ/DC500V
 - Withstanding Voltage : AC2000V/1min
 - Wire range: 22-14AWG 4.0mm²
- Mechanical
 - Operating temperature: -40°C ~ +105°C
 - Soldering temperature: 250°C ±5/5sec
 - Torque: 0.5N.m (4.43lb.in)

HOW TO ORDER

TB-150-9.0-XXP-2 X-XXXXXX

