REV.	DESCRIPTION	DATE	DRAWN	APPROVED
A1	DWG.REL	2015.3.12	FANG	YANG

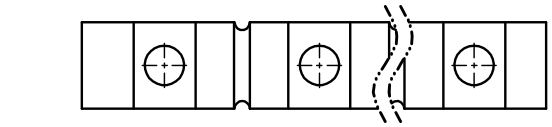

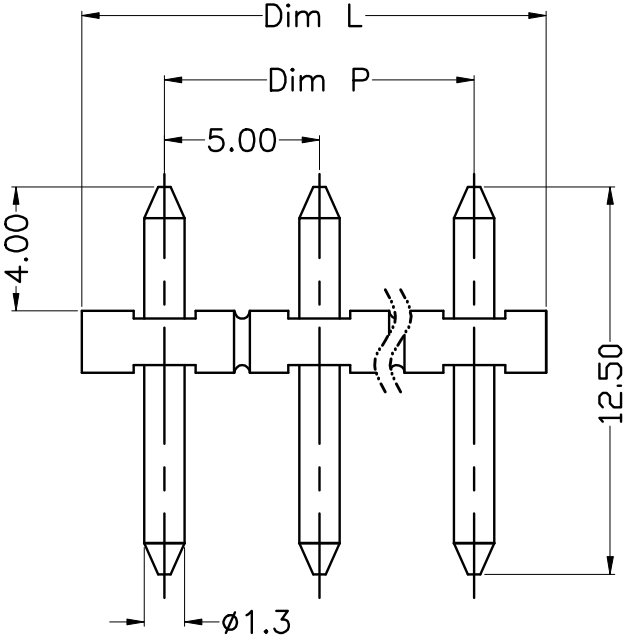

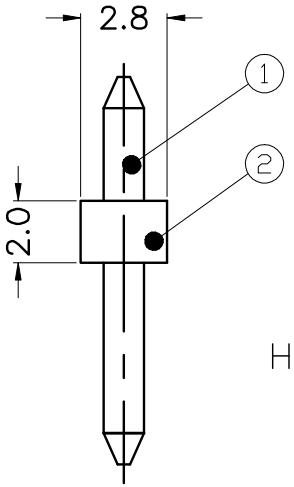

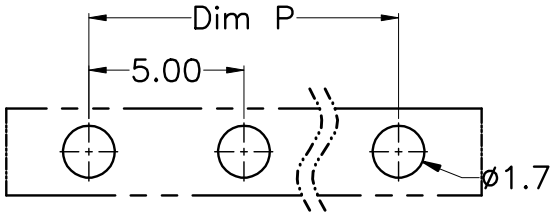

P.C.B.LAYUOT

- Material
  ①Pin header : Brass, Tin plated
  ②Housing : PA66, UL94V-0

- Electrical UL IEC
  Rated voltage : 300V 250V
  Rated current : 10A 12A
  Insulation resistance: 500MΩ/DC500V
  Withstanding Voltage : AC2000V/1min

- Mechanical
  Operating temperature:-40℃~+105℃
  Soldering temperature:250℃±5/5sec

N=Number of Poles
Dim P=(N-1)x5.00
Dim L=Nx5.00

Poles \ Dim	Dim P	Dim L
2-6P	±0.10	±0.15
7-12P	±0.20	±0.20
13-18P	±0.25	±0.30
19-24P	±0.30	±0.40

HOW TO ORDER

KF332N-5.0-XXP-1 X-XXXXX

- KF332N: MODEL
- 5.0: Pitch:mm
- XX: No.of poles: 2~24P
- 1: 1:Single Pitch, 2:Double Pitch
- X: Color: G:Green R:Red K:Black W:White O:Orange B:Blue GR:Gray
- XXXXX: Customer Request

GENERAL TOLERANCE		ANGLE TOLERANCE	
X.	±0.5	X°.	±5°
.X	±0.3	.X°	±3°
.XX	±0.1	.XX°	±1°

DRAWING TYPE	CUSTOMER		
SCALE	1:1	SHEET	1 OF 1
DRAWING NO.			

PROJECTION		TITLE	KF332N-5.0-XXP
UNITS	mm		
SHEET SIZE	A4	SERIES	KF332N

科奕科技有限公司