


REV.	DESCRIPTION	DATE	DRAWN	APPROVED
A1	DWG.REL	2015.3.12	FANG	YANG

- Material
  - ◊Screws : M2.5 steel, Zinc plated,
  - “-” slot type
  - ◊Housing : PA66, UL94V-0
  - ◊Clamp : Steel, Zinc plated
  - ◊Pin header : Brass, Tin plated
- Electrical
  - UL IEC
  - Rated voltage : 300V 250V
  - Rated current : 20A 20A
  - Insulation resistance: 500MΩ/DC500V
  - Withstanding Voltage : AC2000V/1min
  - Wire range: 24-12AWG 4.0mm<sup>2</sup>
- Mechanical
  - Operating temperature: -40°C to +105°C
  - Soldering temperature: 250°C±5/5sec
  - Torque: 0.5N.m (4.43lb.in)
  - Strip length: 6-7mm

### HOW TO ORDER

KF129R-5.0-XXP-1 X-XXXXX

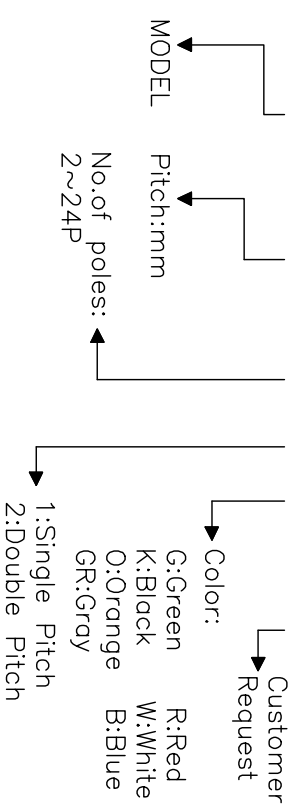

N=Number of Poles  
Dim P=(N-1)x5.00  
Dim L=Nx5.00

Poles	Dim P	Dim L
2-6P	±0.10	±0.15
7-12P	±0.20	±0.20
13-18P	±0.25	±0.30
19-24P	±0.30	±0.40

### GENERAL TOLERANCE ANGLE TOLERANCE

X.	±0.5	X.	±5'
.X	±0.3	.X.	±3'
.XX	±0.1	.XX.	±1'

DRAWING TYPE	CUSTOMER	SHEET	1 OF 1
SCALE	1:1		
DRAWING NO.			

PROJECTION	TITLE
UNITS mm	KF129R-5.0-XXP
SHEET SIZE A4	SERIES KF129R

# 科奕科技有限公司