

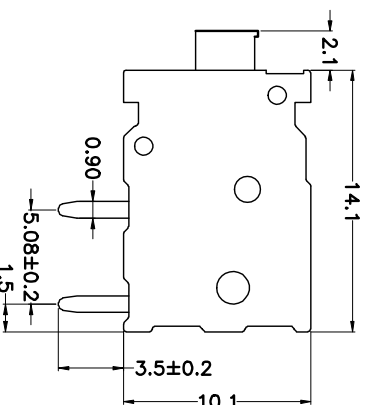
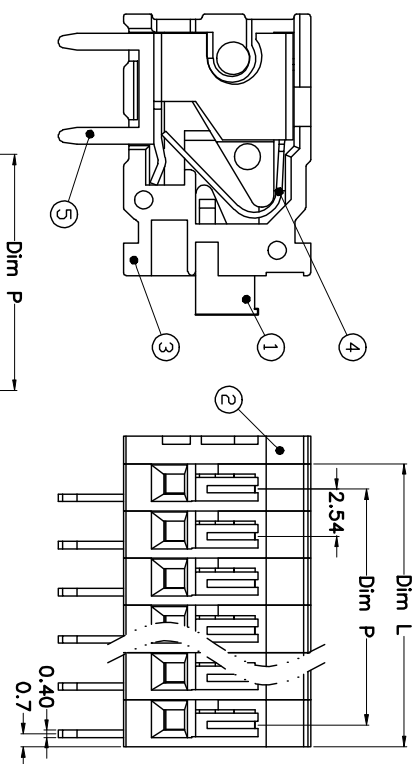


REV.	DESCRIPTION	DATE	DRAWN	APPROVED
A1	DWG.REL	2015.3.12	FANG	YANG

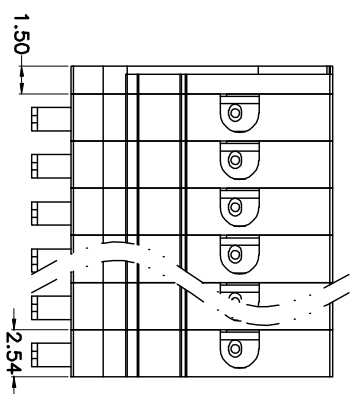

N=Number of Poles
 Dim P=(N-1)X2.54
 Dim L=Nx2.54

Poles	Dim P	Dim P	Dim L
2-6P	±0.10	±0.15	±0.20
7-12P	±0.20	±0.20	±0.20
13-18P	±0.25	±0.30	±0.30
19-24P	±0.30	±0.30	±0.40

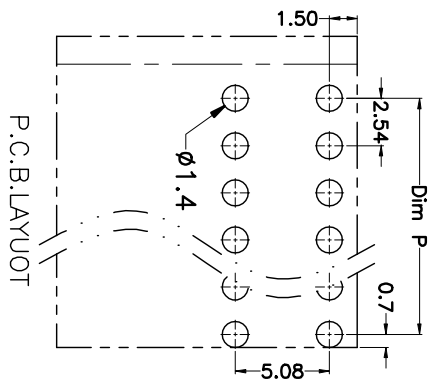


- Material
 - ⊙Button : PA66, UL94V-0
 - ⊙Cover : PA66, UL94V-0
 - ⊙Housing : PA66, UL94V-0
 - ⊙Reed : Stainless steel
 - ⊙Pin header : Brass, Tin plated

- Electrical
 - UL IEC
 - Rated voltage : 150V 130V
 - Rated current : 5A 6A
 - Insulation resistance: 500MΩ/DC500V
 - Withstanding Voltage : AC1250V/1min
 - Wire range: 24-20AWG 1.0mm²

- Mechanical
 - Operating temperature:-40°C~+105°C
 - Soldering temperature:250°C±5/5sec
 - Strip length: 11mm

HOW TO ORDER

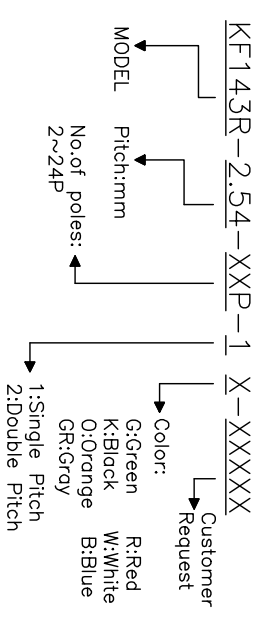

GENERAL TOLERANCE	ANGLE TOLERANCE	PROJECTION	TITLE
X. ±0.5	X. ±5'	⊕	KF143R-2.54-XXP
.X ±0.3	.X' ±3'	mm	
.XX ±0.1	.XX' ±1'	A4	
DRAWING TYPE	CUSTOMER	SHEET	1 OF 1
SCALE	1:1		
DRAWING NO.			

科奕科技有限公司