
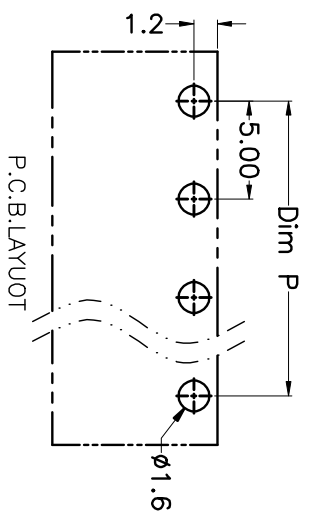
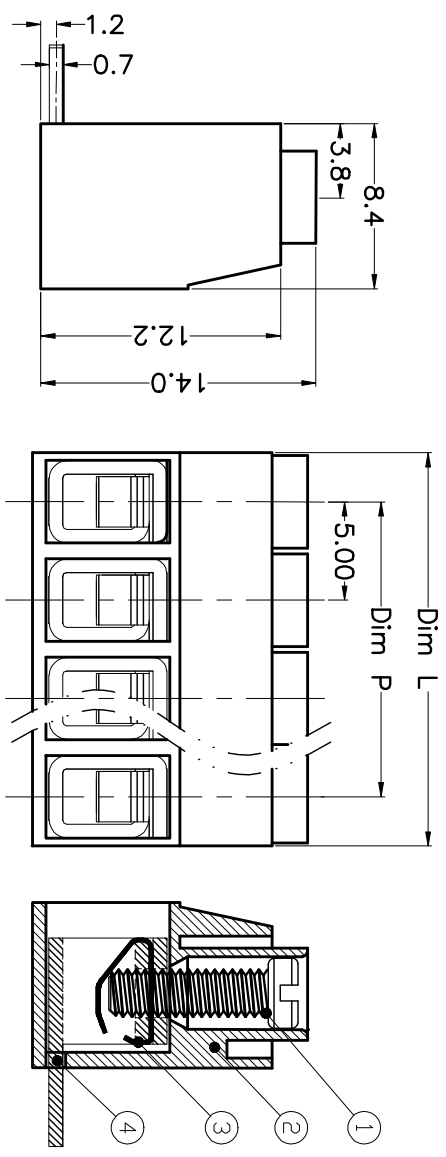


| REV. | DESCRIPTION | DATE | DRAWN | APPROVED |
|------|-------------|-----------|-------|----------|
| A1 | DWG.REL | 2015.3.12 | FANG | YANG |

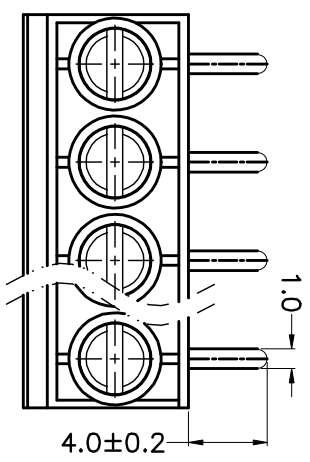

N=Number of Poles
Dim P=(N-1)x5.00
Dim L=Nx5.00

| Poles | Dim P | Dim L |
|--------|-------|-------|
| 2-6P | ±0.10 | ±0.15 |
| 7-12P | ±0.20 | ±0.20 |
| 13-18P | ±0.25 | ±0.30 |
| 19-24P | ±0.30 | ±0.40 |

| GENERAL TOLERANCE | | ANGLE TOLERANCE | |
|-------------------|------|-----------------|-----|
| X | ±0.5 | X | ±5° |
| X | ±0.3 | X | ±3° |
| .XX | ±0.1 | .XX | ±1° |

| DRAWING TYPE | CUSTOMER | SHEET | 1 OF 1 |
|--------------|----------|-------|--------|
| SCALE | 1:1 | | |
| DRAWING NO. | | | |


- Material
 ØScrews : M2.5 steel, Zinc plated,
 “_” slot type
 ØHousing : PA66, UL94V-0
 ØReed : Phosphor bronze, Ni plated
 or stainless steel
 ØPin header : Brass, Tin plated

- Electrical
 UL IEC
 Rated voltage : 300V 250V
 Rated current : 15A 22A
 Insulation resistance: 500MΩ/DC500V
 Withstanding Voltage : AC2000V/1min
 Wire range: 22-14AWG 0.5-2.5mm²

- Mechanical
 Operating temperature: -40°C ~ +105°C
 Soldering temperature: 250°C ±5 / 5sec
 Torque: 0.4N.m (3.54Lb.in)
 Strip length: 6-7mm

HOW TO ORDER

KF167 R -5.0-XXP-1 X-XXXXXX

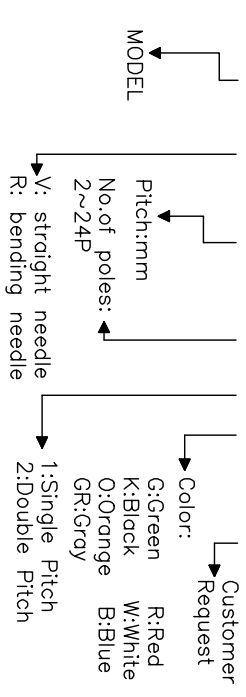

| PROJECTION | TITLE |
|----------------|----------------|
| UNITS: mm | KF167R-5.0-XXP |
| SHEET SIZE: A4 | SERIES: KF167R |

科奕科技有限公司